

4000 Series


4016TEG1

Diesel Engine –
Electro Unit

1692 kWm 1500 rev/min

The Perkins 4000 Series family of 6, 8, 12 and 16 cylinder diesel engines was designed in advance of today's uncompromising demands within the power generation industry and includes superior performance and reliability.

The 4016TEG1 is a turbocharged, air to water charge cooled, 16 cylinder vee form diesel engine. Its premium design and specification features provide economic and durable operation as well as exceptional power to weight ratio, improved serviceability, low gaseous emissions, overall performance and reliability essential to the power generation market.

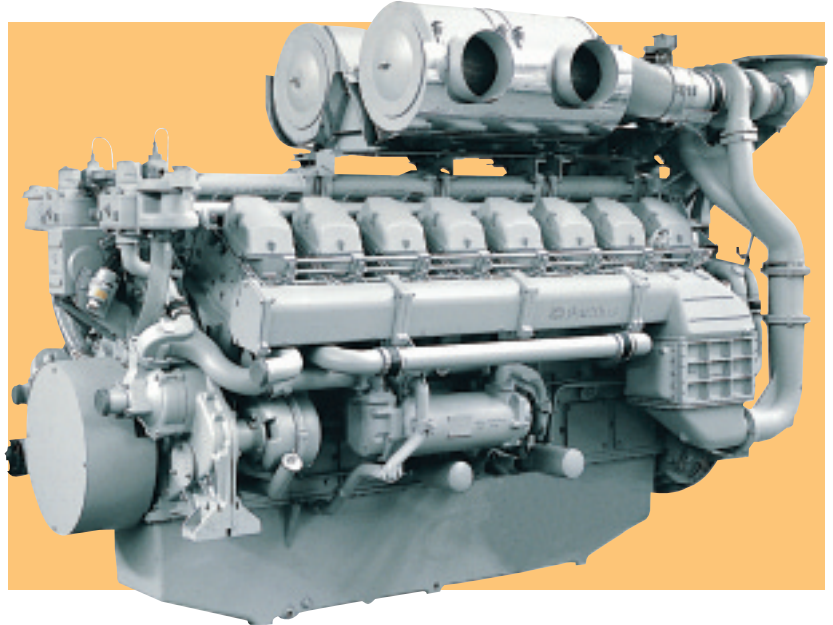

Economic power

- Individual 4 valve cylinder heads giving optimised gas flows.
- Unit fuel injectors ensure ultra fine fuel atomisation and hence controlled rapid combustion.
- Commonality of components with other engines in 4000 Series family for reduced stocking levels.

Reliable power

- Developed and tested using latest engineering techniques.
- Piston temperatures controlled by an advanced gallery jet cooling system.
- Tolerant of a wide range of temperatures without derate.
- Over 4000 distributors and dealers worldwide.

Clean, efficient power

- Exceptional power to weight ratio and compact size for easier transportation and installation.
- Designed to provide excellent service access for ease of maintenance.
- Engines designed to comply with major international standards.
- Low gaseous emissions.

Engine Speed rev/min	Type of Operation	Typical Generator Output (Net)		Engine Power			
		kVA	kWe	Gross		Net	
				kWm	bhp	kWm	bhp
1500	Continuous baseload	1476	1181	1230	1650		
	Prime power	1845	1476	1538	2062		
	Standby (maximum)	2030	1624	1692	2269		

The above ratings represent the engine performance capabilities guaranteed within plus or minus 3% at the reference conditions equivalent to those specified in ISO 8528/1, ISO 3046/1, BS5514/1.

Ratings conditions: 25°C air inlet temperature, barometric pressure 100 kPa, relative humidity 30%. Please consult your distributor or the factory for ratings in other ambient conditions.

Note: For full ratings please refer to Perkins Engines Company Limited. All electrical ratings are based on an average alternator efficiency and a power factor of 0.8.

Fuel specification: BS2869 Class A1 + A2 or ASTM D975 No 2D.

Rating Definitions

Continuous baseload – Power available for continuous full load operation. No overload is permitted.

Prime power – Power available for variable load with an average load factor not exceeding 80% of the prime power rating in any 24 hour period. Overload of 10% permitted for 1 hour in every 12 hours operation.

Standby maximum – Power available at variable load in the event of a main power network failure for a maximum of 500 hours per year. No overload is permitted.

Standard Electro Unit Specification

Governing

- Electronic governor to ISO 3046 part 4 (BS5514/4) A1

Electrical equipment

- 24 volt electrical equipment comprising twin starter motors, battery charging alternator with integral voltage regulator and activating switch

Flywheel and housing

- SAE 18 flywheel, SAE 00 housing

Fuel system

- Direct fuel injection system, fuel lift pump, hand stop control

Lubrication system

- Lubricating oil filters
- Engine jacket water/oil temperature stabilizers

Cooling system

- Two twin thermostats, two jacket water pumps
- Free end crankshaft pulley

Engine protection

- 24 volt stop solenoids (energised to run)
- Combined high coolant – temperature/low oil pressure switch
- Overspeed switch and magnetic pickup
- Induction air shut-off valves
- Thermocouples for exhaust temperature

Optional Equipment

The following optional extra equipment is available

- Heat exchanger including pipework and de-aeration tank
- Raw water pump

Other optional extra equipment available

- Twin heavy duty air cleaners – paper element with pre-cleaner
- Changeover lubricating oil filter
- Changeover fuel oil filter
- Immersion heater with thermostat
- Air starters
- Instrument panel

NB This list is not exhaustive, further options may be available to meet particular applications on enquiry to Perkins Sales Department



Perkins Engine Company Limited

Tixall Road Stafford ST16 3UB England
 Telephone (01785) 223141 Telex 36156
 Fax (01785) 215110
 www.perkins.com


All information given in this leaflet is correct at the time of printing, but it may be changed subsequently by the Company.

General Data

Number of cylinders	16
Cylinder arrangement	60° Vee form
Cycle	4-stroke
Induction system	Turbocharged. Air to water charge cooled
Combustion system	Direct injection
Cooling system	Water-cooled
Displacement	61.123 litres
Bore and stroke	160 mm x 190 mm
Compression ratio	13.6:1
Direction of rotation	Anti-clockwise, viewed from flywheel end
Firing order	1A,1B,3A,3B,7A,7B,5A,5B 8A,8B,6A,6B,2A,2B,4A,4B
Total lubrication system capacity	237.2 litres

	Electro Unit	Electro Unit with heat exchanger
Total coolant capacity	95 litres	—
Total weight (dry)	5820 kg	6000 kg
Length	3260 mm	3450 mm
Width	1410 mm	1410 mm
Height	2115 mm	2115 mm

Fuel consumption g/kWh	
Engine speed	1500 rev/min
At standby maximum power rating	210
At prime power rating	208
At continuous baseload rating	
At 75% of prime power rating	205
At 50% of prime power rating	210
At 25% of prime power rating	230

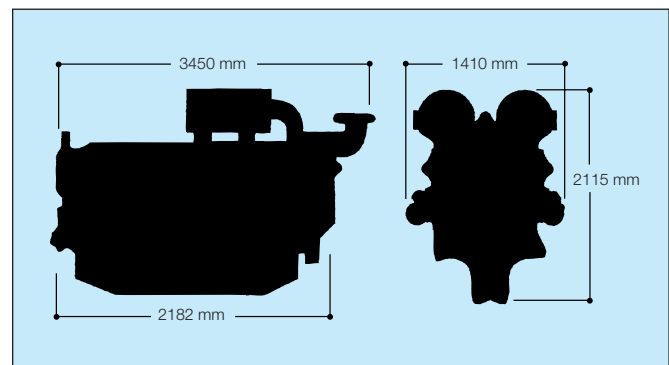

Distributed by